

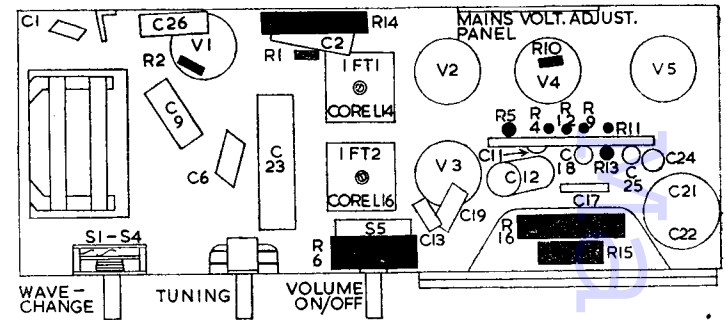
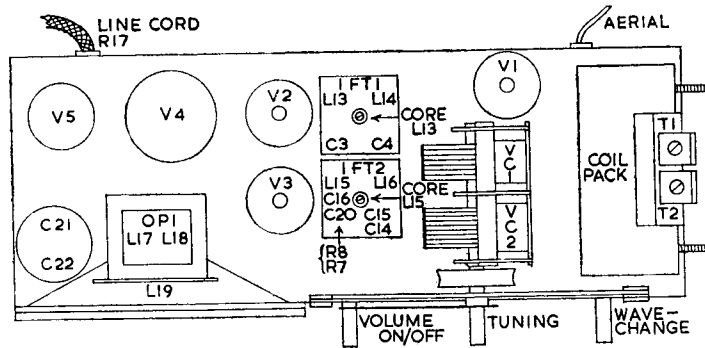
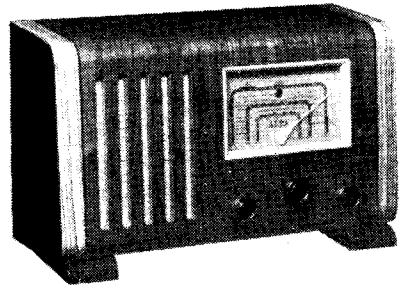
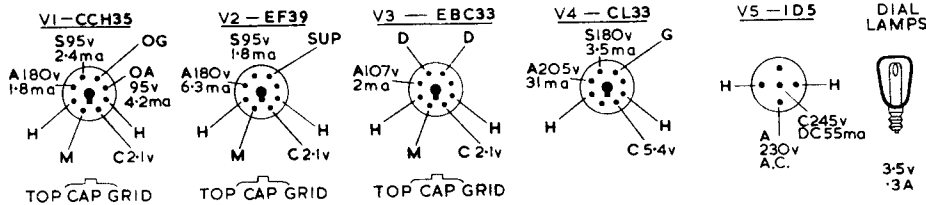




ALBA 472



Five valve, 3-waveband, AC/DC superhet in horizontal, semi-midget style, walnut-veneered cabinet. Has permanently attached "throw-out" type aerial. Manufactured by A. J. Balcombe, Ltd., 52-58, Tabernacle Street, London, EC2.

Circuit description and alignment instructions, see overleaf.



RESISTORS

R	Ohms	Watts
1	10K	1W
2	47K	1W
3	680	1W
4	2.2M	1W
5	100	1W
6	1M Potentiometer (with 5w.)	1W
7	470K	1W
8	47K	1W

R	Ohms	Watts
9	47K	1W
10	47K	1W
11	470K	1W
12	1M	1W
13	150	1W
14	40 Wirewound	5W
15	1.5K	2W
16	560	2W
17	700 Line cord (tapped 100:600)	1W


CAPACITORS

C	Mfds	Type
1	200pf	Silver Mica
2	.1	Tubular 350V
3	100pf	Silver Mica
4	100pf	Silver Mica
5	5,600pf	Silver Mica
6	47pf	Silver Mica

C	Mfds	Type
7	575pf	Silver Mica
8	200pf	Silver Mica
9	.1	Tubular 350V
10	.005	Tubular 350V
11	.05	Tubular 250V
12	.25	Tubular 350V
13	.005	Tubular 500V
14	100pf	Ceramic
15	100pf	Ceramic
16	100pf	Silver Mica
17	200pf	Ceramic
18	.005	Tubular 1,000V
19	.1	Tubular 350V
20	100pf	Silver Mica
21	16	Electrolytic 350V
22	16	Electrolytic 350V
23	8	Electrolytic 500V
24	.05	Tubular 500V
25	.005	Tubular 500V
26	.1	Tubular 350V
27	47pf	Silver Mica
28	47pf	Silver Mica (not fitted on model tested)

INDUCTORS

L	Ohms
1	very low
2	very low
3	.5
4	1.8
5	.78
6	15
7	very low
8	.5
9	1.5
10	.5
11	4.5
12	.5
13	5.5
14	5.5
15	7.0
16	6.5
17	300
18	very low
19	2.5

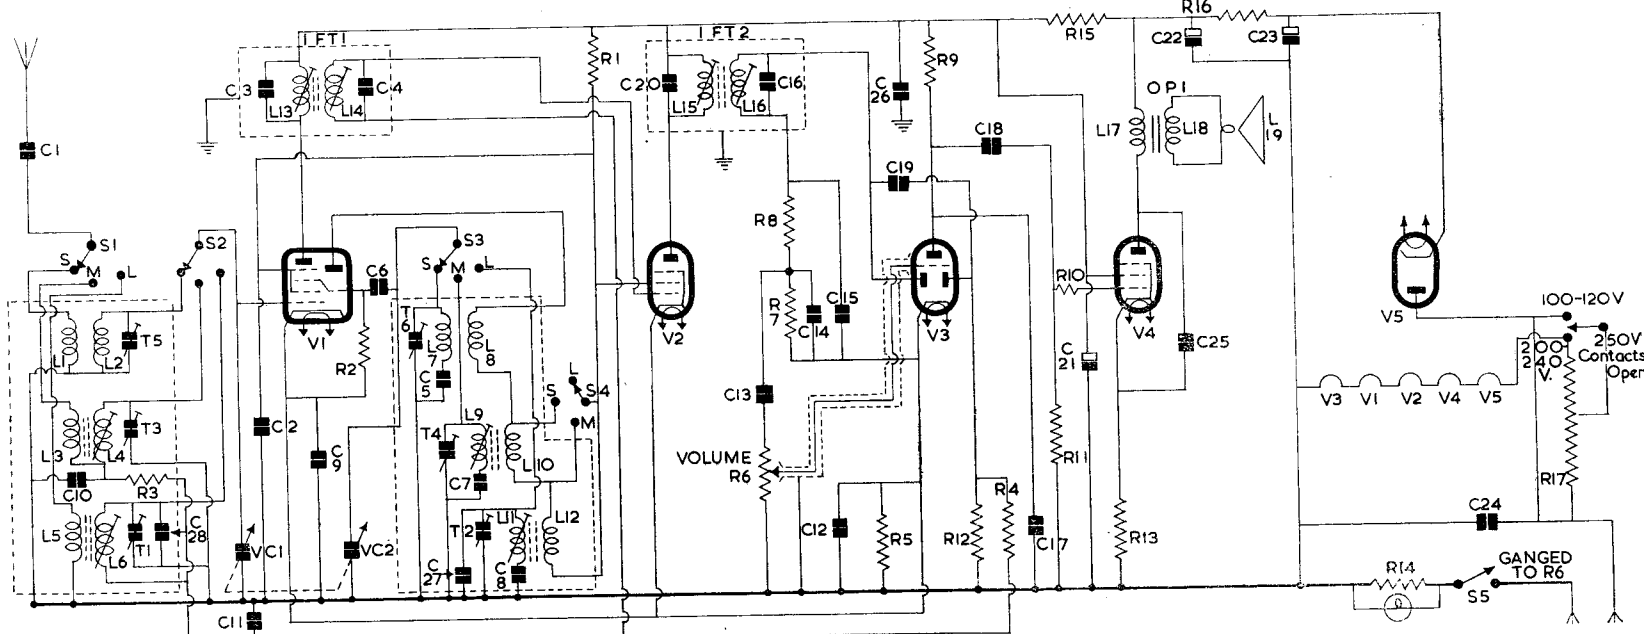

ALBA 472—Continued

Circuit diagram, chassis diagrams and components tables are grouped together for quick reference on the preceding page.

CIRCUIT consists of a triode-hexode frequency-changer V1 feeding into a variable-mu RF pentode IF amplifier V2. A double-diode-triode V3 is used for detection, automatic volume control and audio amplification. The output stage uses a power-amplifier pentode V4 which drives a five-inch permanent-magnet loudspeaker. HT is provided by a half-wave, indirectly heated rectifier V5.

Aerial, consisting of approximately 25 ft. of insulated wire, is connected through isolating capacitor C1 to S1 and thence to aerial coupling coils L1 (SW), L3 (MW) and L5 (LW).

The aerial tuned circuits L2 (SW), L4 (MW), L6 (LW) are connected by S2 to grid V1 and to tuning capacitor VC1. T5 (SW), T3 (MW), T1 (LW) are trimmers. C28 is additional capacity across T1.

AVC is applied to grid V1 on MW from R3 and decoupled by C10. On LW operation it is obtained from R4 and decoupled by C11. Cathode bias is obtained from R5 and decoupled by C9.

Screen voltage is obtained from R1, which also supplies screen V2 and oscillator anode V1. C2 is decoupling capacitor. L13, C3, primary of IFT1 is in the anode circuit of V1.

Oscillator is connected in a tuned grid, series-fed arrangement. S3 connects tuned circuits L7 (SW), L9 (MW), L11 (LW) to oscillator grid, through coupling capacitor C6, and to tuning capacitor VC2. T6 (SW), T4 (MW), T2 (LW) are trimmers, and C5, C7, C8 are associated padders. C27 is additional LW trimming capacity.

R2, C6 provide automatic oscillator grid bias. Anode reaction coils L8, L10, L12 are series connected in the oscillator HT circuit and unwanted coils are shorted out by S4. Oscillator HT is drawn from R1.

IF amplifier operates at 460 kc/s. L14, C4, secondary of IFT1, applies signal to grid V2. AVC is fed to grid in series with L14, from R4 and decoupled by C11. Cathode bias is obtained from R5 and decoupled by C12. Screen voltage is drawn from R1, in common with screen and oscillator anode V1. L15, C20, which form the primary of IFT2, are in the anode circuit of V2.

Demodulator. L16, C16, the secondary of IFT2, applies the IF signal to one of the diode anodes V3. R7 is the diode load resistor and R8, C14, C15 constitute an IF filter.

Automatic volume control. C19 feeds signal from secondary of IFT2 to other diode anode V3. R12 is diode load resistor and R4, C11, AVC line decoupling. R5 provides delay voltage.

Audio amplifier. C13 feeds rectified signal to R6, the volume control, and thence to grid of triode section V3. Cathode bias is provided by R5 and decoupled by C12. R5 also provides cathode bias for V1 and V2. R9 is anode load resistor and C17 is RF by-pass capacitor.

Output stage. C18 feeds signal from anode V3 to grid V4, the pentode output valve. R11 is grid resistor and R10 grid stopper. Cathode bias is provided by R13. Negative feedback is introduced here by not decoupling R13.

Screen voltage is obtained from R15 and decoupled by C21. R15 also supplies anodes and

screens of V1 to V3. Primary L17, of output matching transformer OP1 is in the anode circuit. C25 is fitted as tone corrector and also to prevent self oscillation taking place in V4. L18, the secondary of OP1, feeds into I19, the low-impedance speech coil of a five-inch, permanent-magnet loudspeaker.

High tension is obtained from an indirectly heated, half-wave rectifier V5. Its anode voltage is provided by the mains input supply. Resistance capacitance smoothing is provided by R16, C22, C23. C24 is to eliminate modulation hum.

Heaters V1-V5 are connected in series and obtain their current through dropper resistor R17. Provision is made to short out portions of R17 when 110V and 240V mains supplies are used. S5, which is ganged to volume control R6, is the on/off switch.

Dial light is connected across R14 which is in the chassis side of the mains supply.

Removal of chassis from cabinet. Remove three knobs on front of cabinet. Unwind aerial from supports on rear panel of cabinet and remove panel. Unfasten four wood screws holding cabinet feet and remove same. Chassis bolts are now exposed and can be removed and chassis withdrawn.

TRIMMING INSTRUCTIONS

Apply Signal as Stated Below	Tune Receiver to	Trim in Order Stated for Max. Output
1) 460 kc/s to grid V1 via .01 capacitor ...	550 metres	L16, L15, L14, L13.
2) 15 mc/s to aerial lead via dummy aerial ...	20 metres	T6, T5.
3) 545 kc/s as above	550 metres	Cores of L9, L4.
4) 1.2 mc/s as above	250 metres	T4, T3. Repeat (3) & (4) until max. output is obtained.
5) 150 kc/s as above	2,000 metres	Cores of L11, L6.
6) 300 kc/s as above	1,000 metres	T2, T1. Repeat (5) & (6) until max. output is obtained.

Valve Data


Two valuable publications are *Brimar Radio Valve Manual 1947-8* issued to the Trade by Standard Telephones and Cables Ltd., Footscray, Kent, at 2s. 6d. and a wall-hanging folder *Marconi Valves* available from EMI Sales and Service Ltd., Sheraton Works, Hayes, Middx.

The *Brimar Manual* is particularly useful because it contains details of the many American-type valves supplied by the firm including some of the latest miniature and other types. For reference purposes several obsolete types are also recorded.

Base connections and characteristic curves are given and at the end of the book there are four circuits of amplifiers, some formulae, abacs, colour codes, and lists of equivalents and prices.

Marconi chart presents an attractive "cover girl" and tables covering prices, battery and mains ranges, obsolescent types, base connections, equivalents and, finally, nine large pages specifying Marconi valves employed in popular receivers of leading makes.

The chart will be most useful for replacement guidance in service shop and showroom.




ALL-PURPOSE TESTER

MULTI-RANGE TESTING SET FOR A.C. AND D.C.

Measures: Volts — Amperes — Resistance and Capacity.

- RANGES: 5, 25, 125, 250 and 1,000 volts. 1, 10, 100 and 1,000 Milliamps. 150 to 50,000 ohms and 7.5 Megohms. .02 to 16 Microfarads.
- "Dwarf" Omni-Range Current Transformer giving ranges on A.C. of 10, 25, 50, 125 and 250 amperes. the secondary current being 1 ampere.



EVERETT EDGCUMBE


Manufacturers of all kinds of indicating and recording electrical instruments. Photometry experts.

Colindale Works, London, N.W.9



Add Gleaming Glamour to your Good Service Work

"Uniflex" Scratch Remover Kit contains 3 large bottles, Walnut, Oak and Black Wood Dyes, 3 Felt Brushes, and 50 White Circles.

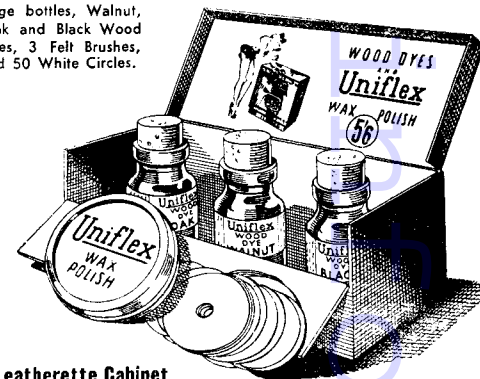

"Uniflex" is non-sticky, does not lift cellulose. Highly penetrating and instant drying.

The Complete Kit in Leatherette Cabinet

FROM ALL WHOLESALE 4/1½ (5/6 Retail)

SERVISOL LTD.

CROWN WORKS. BOUNDARY PLACE. LIVERPOOL. 7

★ In addition there is a tin of an entirely all-wax type polish for cellulose surfaces. This is an amazing invention.